


Stainless Steel Three Phace High Efficiency IE2 IP69K

High Efficiency IE2
Power Range: 0,18~0,75 kW
Protection: IP69k
Insulation: Aqua-Tech
Stainless Steel: High Polized 304 Material

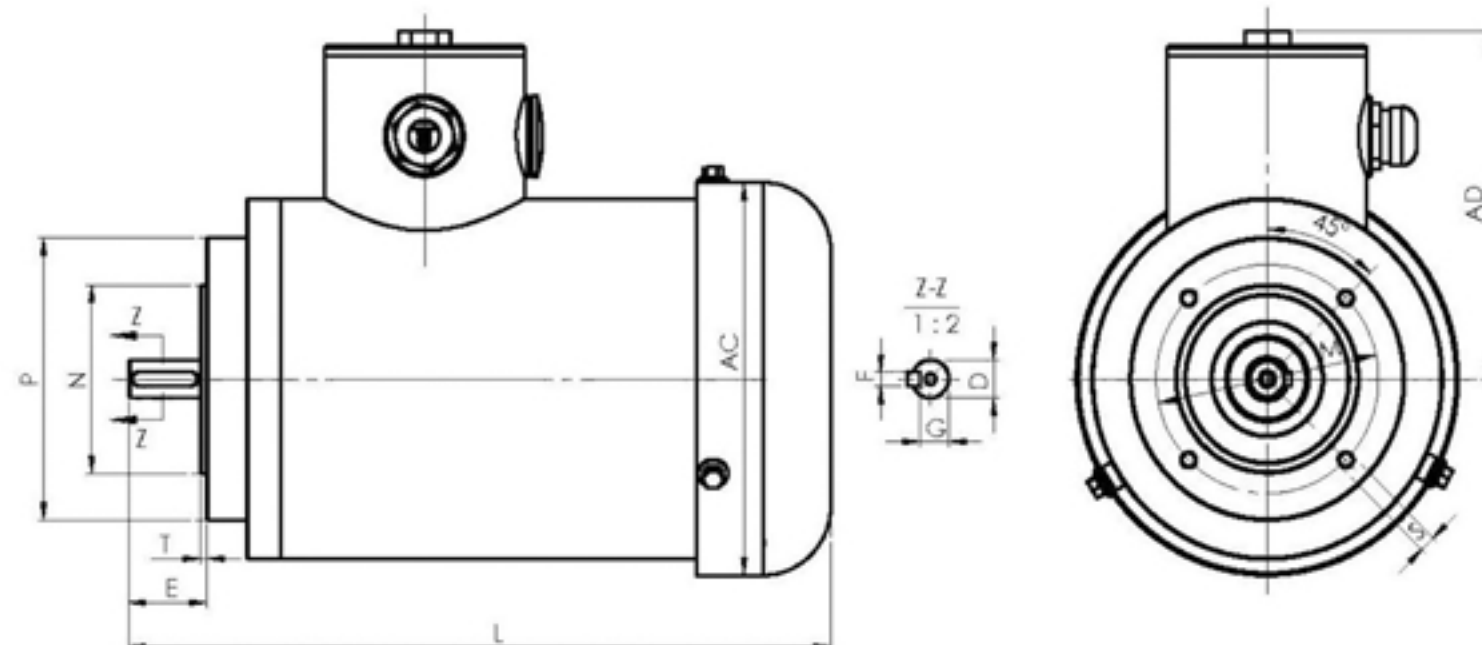

FRAME	POLES	COOLING	POWER		MOUNTING	IP	D	L	E	F	G	M	N	P	R	S	T	FLANGE HOLE	SHAFT HOLE	AC	AD	FRONT BEARING	REAR BEARING
			Kw	HP			mm																
63	4	TENV	0,18	0,25	B14	IP69K	11	237	23	4	8,5	75	60	90	0	M5	2,5	4	M4	114	117	6202	6202
71	4	TENV	0,25	0,34	B14	IP69K	14	243	30	5	11	85	70	105	0	M6	2,5	4	M5	134	129	6203	6203
71	4	TENV	0,37	0,5	B14	IP69K	14	253	30	5	11	85	70	105	0	M6	2,5	4	M5	134	129	6203	6203
80	4	TENV	0,55	0,75	B14	IP69K	19	308	40	6	16	100	80	120	0	M6	3	4	M6	144	135	6204	6204
80	4	TENV	0,75	1	B14	IP69K	19	348	40	6	16	100	80	120	0	M6	3	4	M6	144	135	6204	6204